

R6-4a LED-Enhanced Roundabout Sign

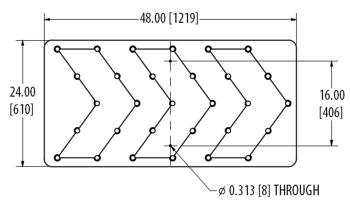

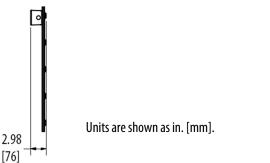

					_	
SP	E <i>C</i> I	CI	CN	ш	n	NC
	- 4	П			w	143

Sign Substrate	.080 highway grade aluminum				
Reflective Sheeting	3M™ Diamond Grade™ DG³ with anti-graffiti overlay				
MUTCD Compliance	Section 2A.07 Retroreflectivity and Illumination				
Color	Diamond Grade White background/Black chevrons				
Mounting	Standard traffic sign 7/16 in. hardware				
LED Flash Pattern	Chasing @ variable speeds				
LED Size	25mm (1 in.)				
LED Number	30 LEDs per sign; 10 LEDs per chevron arrow				
LED Colour	White				
LED Brightness	48 lm per LED				
LED Beam Angle	9°				
Operating Voltage	12VDC				
(Controller)					
Power Supply	120VAC				
Power Consumption	12VA				
Control System	LaneLight LED Sequencer				
Activation	Radar detection unit (vehicle speed and direction)				
Radar	K-band ultra low power Doppler radar				
Operating Temp.	-40 to +158°F [-40 to +70°C]				
Warranty	5 year limited warranty for defects in manufacturing,				
	factory assembly and materials only; excludes damage				
	caused by vehicles or vandalism				

OVERVIEW

The LaneLight LED-Enhanced R6-4a Roundabout Sign provides effective notification to drivers regarding a change in travel direction. This sign is designed specifically for use within roundabout intersections.

The 48 x 24 in. sign features three LED-enhanced arrows; each arrow has ten white LED flashers. During the lighting chase sequence, each arrow is illuminated separately, and progression follows the direction of the arrows and repeats until the configured activation time expires. Separate signs operate independently of each other.

The LaneLight control cabinet designed specifically for this sign contains a power converter, an LED Sequencer, and a radar sensor unit. The radar sensor, mounted inside the control cabinet door, detects the presence of oncoming traffic and sends an activation signal to the LED Sequencer, which activates the LEDs on the sign.

LED dimming, flash length and system activation time are configured via DIP switches located on the LED Sequencer in the control cabinet. If required, radar detection parameters may be adjusted via a custom computer-based utility program.

CONTACT INFORMATION

To order, or for more information, contact ITEM/LaneLight:

Unit 16 – 755 Vanalman Avenue Victoria, BC V8Z 3B8 Canada Toll-Free: 1-866-466-4836 Fax: 250-381-4830 info@lanelight.com www.lanelight.com

